

1) Optical axis receiver 2) Optical axis emitter 3) Power 4) Light reception/Limit range 5) Sn

- Photoelectric sensor
- Series 18M
- LED, red light
- up to 10 m



General attributes

Adjuster	Potentiometer 270° (1x)
Approvals / Conformity	CE cULus
Basic standard	IEC 60947-5-2
Enclosure Type per IEC 60529	IP67
Indicator	Power - LED GN Light receipt - LED YE Limit range - LED YE, flash.
Polarity reversal protected	yes
Protection Class	II
Reference reflector	BOS R-1
Series	Series 18M
Setting	Switching distance (Sn)
Short circuit protected	yes

Electrical attributes

Connection type	Connector
Eff. operating current Ie	100 mA
Eff. operating voltage Ue DC	24.0 V
Electrical version	DC, direct current
Load capacitance max. (at Ue)	0.10 µF
No-load current max. Io at Ue	30 mA
Operating voltage UB max. DC [V]	30.0 V
Operating voltage UB min. DC [V]	10.0 V
Rated insulation voltage Ui	75 V DC
Ripple max. (% of Ue)	15 %
Switching freq. f max. (at Ue)	400 Hz
Switching function	NO (pin 4)
Switching output	PNP (1x)
Turn on time ton max.	1.25 ms

Voltage drop Ud max. (at Ie)

2.5 V

Mechanical attributes



Ambient temperature Ta max.	55 °C
Ambient temperature Ta min.	-5 °C
Connector type	M12x1-S04
Eff. operating distance Sr	7000 mm
Housing material	Brass
Length 1	Ø18.0 mm
Length 2	75.0 mm
Mounting type	Nut M18x1
Operating range Ro	0...7 m
Range Sn	Sn = 7 m, adjustable
Sensing face material	Glass
Style	Cylinder, straight optics
Surface protection	Nickel-plated
Tightening torque max.	15/30 Nm

Optical attributes

LED group acc. IEC 62471	Exempt group
Light type	LED, red light
Polarizing filter	yes
Principle of optical operation	Retro-reflective sensor
Switching function, optical	NO: dark-on
Wavelength	626 nm

Additional text

Order accessories separately.
Polarizing filters prevent spurious switching due to reflecting and shiny parts.
The sensor is functional again after the overload has been eliminated.
For additional information, refer to user's guide.

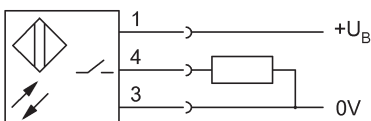

Photoelectric sensor

BOS 18M-PS-PR20-S4
BOS01C3

BALLUFF

sensors worldwide

